



34271 James J Pompo
Fraser, MI. 48026

Email:
sales@hiwattinc.com

Phone : 1-800-321-8007
Fax: 586-415-9265

STOCK PROCESS AIR HEATERS

Features:


- For upset air heat staking
- Exit air to 1000° F. At 10 CFM
- 1/2 in. dia. s.s sheath
- Max. 10 CFM Min. 5.5 CFM
- Pressure rating 80 PSIG
- Use dry, clean air
- **DO NOT OPERATE WITHOUT AIR FLOW**

AIR HEATERS

QUICK DISCONNECT LEAD "QD"



36 IN. FIBERGLASS LEADS

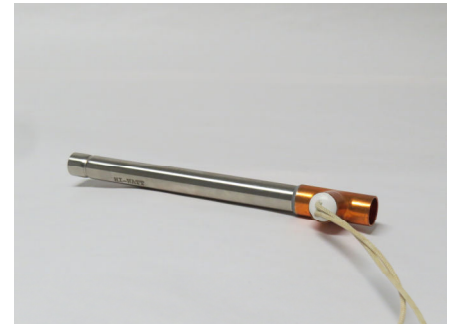

Part Number	Volts	Watts	Lead Type	Inlet	Outlet
PA036L	120	400	36" FG	STD	STD
PA139L	240	400	36" FG	STD	STD
PA036	120	400	QD	STD	STD
PA139	240	400	QC	STD	STD
PA024	120	600	QD	STD	STD
PA024L	120	600	36" FG	STD	STD
PA036LTI	120	400	36" FG	3/8"NPT	STD
PA036LTITO	120	400	36" FG	3/8"NPT	3/8"NPT
PA139LTI	240	400	36" FG	3/8"NPT	STD
PA139LTITO	240	400	36" FG	3/8"NPT	3/8"NPT
PA036TI	120	400	QD	3/8"NPT	STD
PA036TITO	120	400	QD	3/8"NPT	3/8"NPT
PA044	240	600	QD	STD	STD
PA044L	240	600	36" FG	STD	STD

HEATER OPTIONS

3/8" NPT BRASS INLET
(TI)



BARBED BRASS
INLET



3/8" NPT BRASS OUTLET
(OT)



Call for pricing and additional sizes!!




34271 James J Pompo
Fraser, MI. 48026

Email:
sales@hiwattinc.com

Phone : 586-415-9260
Fax: 586-415-9265

QUICK DISCONNECT CABLES

Part Number	Length	Config.
PARK30-18/5M	5 M	Straight
PARR30-18/5M	5M	90°

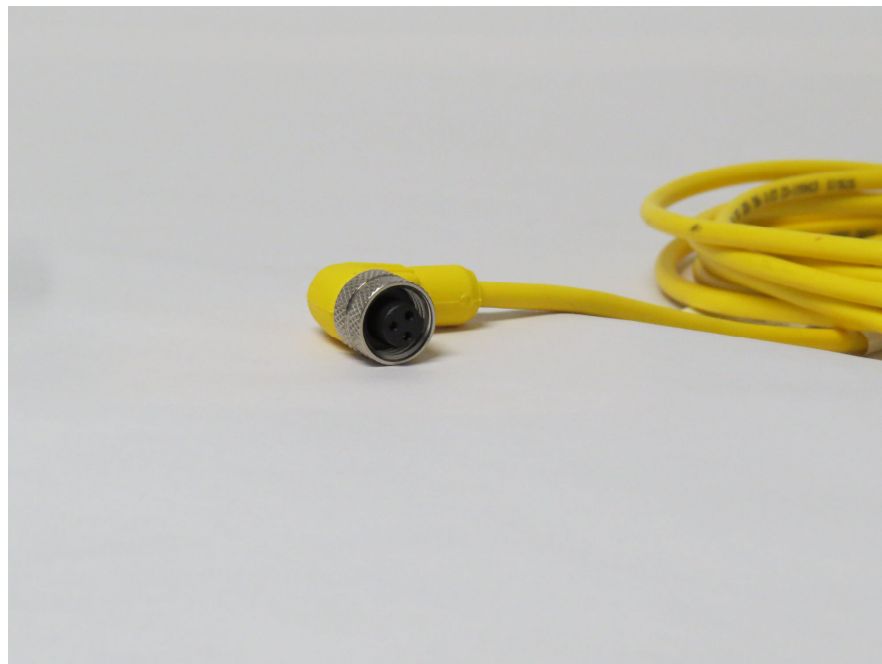

Call for pricing and additional sizes!!