



34271 James J Pompo
Fraser, MI. 48026

Email:
sales@hiwattinc.com


Phone : 1-800-321-8007
Fax: 586-415-9265

Stock Hotrunner Cables

Part Number	Zone	Lead Length
CAS-PWC-12-25F/25M-10	12	10'
CAS-PWC-12-25F/25M-20	12	20'
PWC8-10	8	10'



Part Number	Zone	Lead Length
CAS-THC-12-25F/24F-10	12	10'
CAS-THC-12-25F/24F-20	12	20'
THC8-10	8	10'

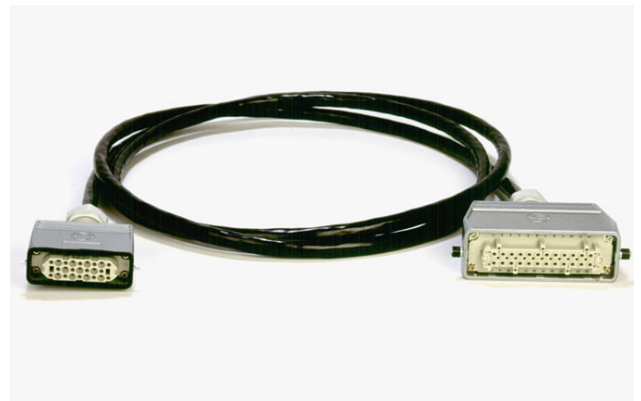

Part Number	Zone	Lead Length
PTC1-10	1	10'



Call for pricing and additional sizes!!



34271 James J Pompo
Fraser, MI. 48026

Email:
sales@hiwattinc.com

Phone : 1-800-321-8007
Fax: 586-415-9265

Stock Hot Runner Controls


MFH-1-120V: Single Zone Mold Control 120V

- 208 to 240Vac, single phase 120Vac (Optional)
- 15 Amp Capable
- 3600 Watts
- Size: 6 1/2" Wide, 2" High, 10" Deep
- Set Point Range – 0° to 999° F
- Control Accuracy – +/- 1° F (0.5° C)
- Calibration Accuracy – Better than 0.2% full range



S20-D3C: Control Card

- Automatic or Manual Operation
- Advanced Anti-Arcing Circuitry w/"ITC" Main frames
- Automatic Soft Start
- Amperage Measurement & Display
- Type "J" or "K" Thermocouple
- "F" or "C" Temperature ranges
- Selectable Control Methods – Adaptive-auto-tuning PID or Fuzzy Logic
- Manual Control for non-thermocouple applications
- This Module operates all "ITC" 15 and 30amp main

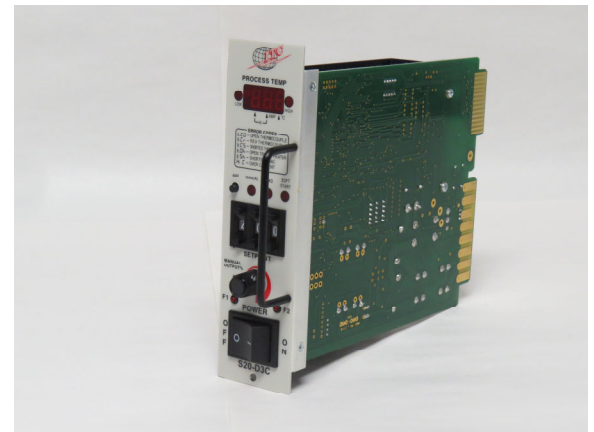

Call for pricing and additional Controls Options!!